

CIVILS

LANDSCAPING

AQUA

SPORT

# RECYFIX SERVICE CHANNELS

## Cable management system

For the safe management of cables at stadiums, race tracks, industrial applications and telecommunication



# RECYFIX® SERVICE CHANNELS

## HAURATON SERVICE CHANNELS FOR SPORTS VENUES AND INDUSTRIAL APPLICATIONS

Nowadays, an essential requirement for any venue hosting national or international events is the safe management of cables needed to facilitate multi-media communication and TV broadcasts from the world's television companies. HAURATON have gained invaluable expertise supplying their systems in to prestigious stadiums in many parts of the world.

The RECYFIX SERVICE CHANNELS are available in five different channel sizes ranging from 100mm to 300mm. Some feature SIDE-LOCK®, a patented boltless system

that allows the non-slip covers to be removed quickly and re-fitted easily during cable laying and removal. Once a cover is positioned over the channel, foot pressure is simply applied. A loud click is then heard which confirms the cover is securely locked. The cover can be removed using a large screwdriver inserted into a discreet leverage point.

Also for all kind of industrial applications, where cables have to be laid e.g. to different machineries, the RECYFIX SERVICE CHANNELS can be used.



HAURATON SERVICE CHANNELS at Wembley Stadium in the UK

## AT A GLANCE


- ✓ high strength of PE-PP channels
- ✓ Robust, non-slip ductile iron or bulb plate covers
- ✓ Patented SIDE-LOCK boltless locking system
- ✓ Securely locked covers but still allowing quick access to cables
- ✓ Suitable for internal and external locations




At Yas Marina Circuit in Abu Dhabi the HAURATON SERVICE CHANNELS are used in the pit lane

## RECYFIX®SERVICE CHANNELS - Cable ducts


**STANDARD**  
Version



NW 100, Type 010



NW 100 Type 01




NW 100 Type 010


**SUPER KS**  
Version




NW 200, Type 010




NW 100 Type 01



NW 150 Type 01



NW 100 Type 010




NW 200 Type 020

**SUPER**  
Version



NW 300, Type 01




NW 300 Type 01

|   | LENGTH<br>MM | WIDTH<br>MM | HEIGHT<br>MM | WEIGHT<br>KG | ITEM-<br>NO. |
|---|--------------|-------------|--------------|--------------|--------------|
| RECYFIX SERVICE CHANNEL STANDARD 100 Type 01  | 1000         | 160         | 135          | 2.5          | 40200        |
| RECYFIX SERVICE CHANNEL STANDARD 100 Type 010 | 1000         | 160         | 185          | 3.0          | 40242        |
| RECYFIX SERVICE CHANNEL SUPER KS 100 Type 01  | 1000         | 160         | 153          | 5.3          | 41100        |
| RECYFIX SERVICE CHANNEL SUPER KS 100 Type 010 | 1000         | 160         | 203          | 5.4          | 41142        |
| RECYFIX SERVICE CHANNEL SUPER KS 150 Type 01  | 1000         | 210         | 210          | 5.3          | 40500        |
| RECYFIX SERVICE CHANNEL SUPER KS 200 Type 020 | 1000         | 256         | 253          | 4.9          | 41344        |
| RECYFIX SERVICE CHANNEL SUPER 300 Type 01     | 1000         | 420         | 416          | 14.8         | 40900        |

## RECYFIX®SERVICE CHANNELS - Covers



Solid cover  
galvanised

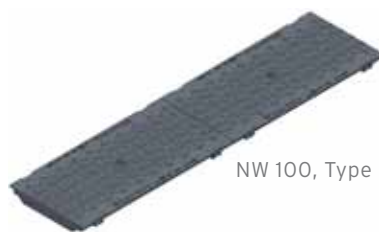

NW 100, Type 010

|  | LENGTH<br>MM | WIDTH<br>MM | HEIGHT<br>MM | WEIGHT<br>KG | ITEM-<br>NO. |
|--|--------------|-------------|--------------|--------------|--------------|
| STANDARD 100 Solid cover, galvanised, cl. A 15   | 1000         | 136         | 22           | 3.1          | 40271        |
| SUPER KS 100 Solid cover, galvanised, cl. C 250  | 1000         | 149         | 20           | 5.5          | 8191         |
| SUPER KS 100 Solid ductile iron cover, cl. E 600 | 500          | 149         | 20           | 4.7          | 8962         |
| SUPER KS 150 Solid ductile iron cover, cl. E 600 | 500          | 199         | 20           | 7.0          | 11270        |
| SUPER KS 200 Solid ductile iron cover, cl. E 600 | 500          | 249         | 20           | 8.7          | 12270        |
| SUPER 300 Solid ductile iron cover, cl. E 600    | 500          | 377         | 40           | 21.5         | 4262         |



**HYGRADE WATER**

PO BOX 3016  
CARLINGFORD, NSW 211  
AUSTRALIA  
[WWW.HYGRADEWATER.COM.AU](http://WWW.HYGRADEWATER.COM.AU)  
[INFO@HYGRADE.NET.NZ](mailto:INFO@HYGRADE.NET.NZ)

Australian Distributor

We reserve the right to do technical changes for improvement!

07/2011 | Printed in Germany  
All drawings, measurements and weights are noncommittal!

AU-20-0711

