

YOUR BENEFITS WITH FASERFIX®KS

HIGH PERFORMANCE ANGLE HOUSING & SIDE-LOCK

- 20 mm x 20 mm angle housing and inlaying grating
- extremely stable connection between steel angle housing and concrete channel body
- 10 fixing points for gratings per metre (incl. 2 times with optional locking handle)
- extra protection against lateral movement
- 90 % time savings in fixing the grating with **SIDE-LOCK** (compared to a conventional fixing)
- replace and insert the grating without any special tool, a screwdriver is enough

= **QUALITY ASSURED & COST SAVINGS**



NUMEROUS GRATING OPTIONS

- made of ductile iron, composite, galvanised or stainless steel
- narrow slot width for pedestrian areas available

= **DESIGN FLEXIBILITY**



HIGH STABILITY

- maximum lateral stability through extra thick walls compared to many competitors' products for additional security in extreme situations
- installation for asphalted surface up to class E 600 without concrete stretcher

= **QUALITY- & PERFORMANCE ASSURED**



HIGH-TECH MATERIAL


- „Made in Germany“
- maximum stability through fibre - reinforced concrete (polypropylene fibres) with low weight
- adheres well to foundation concrete (same coefficient with regard to thermal expansion)
- installation without grating possible
- fire resistance class A1 (not flammable) according to DIN 4102

= **QUALITY- & PERFORMANCE ASSURED**



IDEAL FOR ...

applications with high loads up to class F 900, such as traffic areas for commercial and public areas.

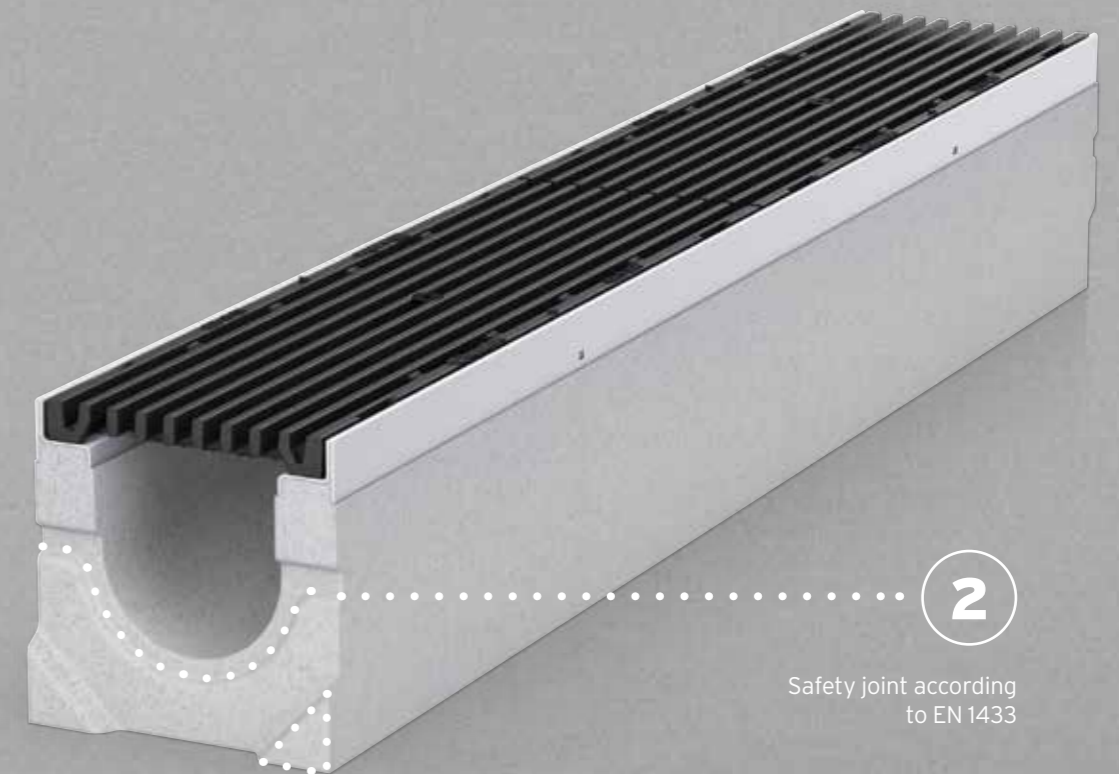

1

Tongue and groove connection

2

Safety joint according to EN 1433