

# YOUR BENEFITS WITH RECYFIX® STANDARD

## FRAME SYSTEM

- PP frame to stop lateral movements
- enables flush connection with gratings which prevents injuries

**= QUALITY & PERFORMANCE ASSURED**



## HIGH-GRADE MATERIAL

- **RECYFIX®** - stable and almost unbreakable
- elastic and especially robust material
- withstands high loads and temperature differences in daily use
- 100 % recycled composite body (and also 100 % recyclable)  
→ 100 % environmentally friendly
- 0 % water absorption
- smooth inner surface for superior flow characteristics
- PP channel body can be cut, drilled and worked easily on site

**= QUALITY & PERFORMANCE ASSURED**



## LOW WEIGHT ENSURES EASY HANDLING ON SITE

- much lighter than channels made of polymer/resin concrete
- easy transport and installation

**= TIME & COST SAVINGS**



## NUMEROUS GRATING OPTIONS

- made of ductile iron, galvanised or stainless steel
- narrow slot width for pedestrian areas available
- stable gratings in loading classes A 15 up to C 250 according to DIN EN 1433

**= DESIGN FLEXIBILITY**



## PRE-ASSEMBLED READY FOR INSTALLATION

- channel and grating = one part
- no spare parts
- easy handling in stock and on construction site
- cost-efficient transport

**= BETTER GROSS MARGIN**



## HIGH RESISTANCE


- high resistance against frost, de-icing salt and UV-rays
- withstands high temperature differences
- for climate ranges from - 50 °C to + 80 °C and more

**= QUALITY ASSURED / LONGEVITY**



## IDEAL FOR ...

domestic applications around the house and garden, such as predominantly private areas, driveways, courtyards, gardens and parks.

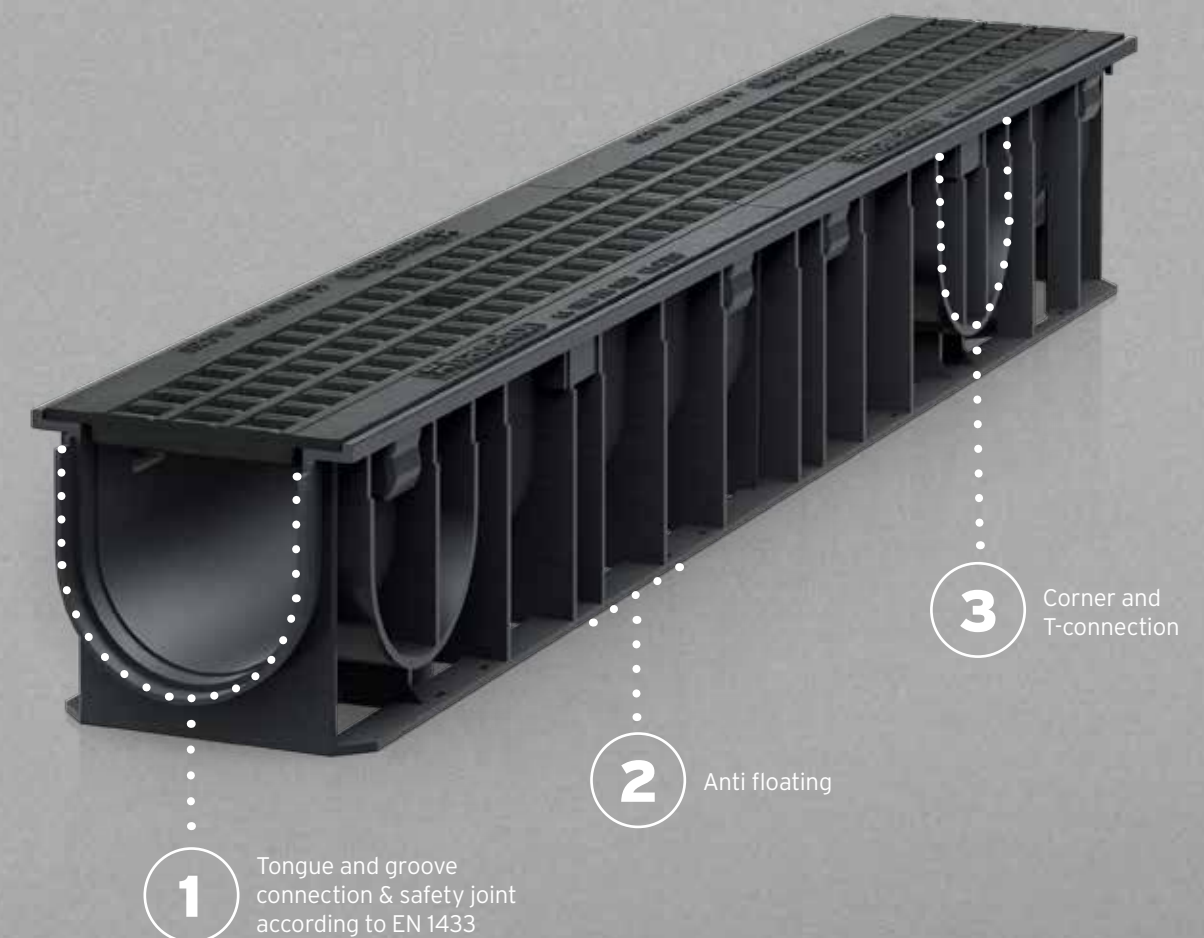

**1** Tongue and groove connection & safety joint according to EN 1433

**2** Anti floating

**3** Corner and T-connection

**The Original**