

**Product Selector**

## **Ports & Terminals**

Drainage systems for quayside  
and landside applications.

# World Leader

## Reliable Performance

A world leader in the manufacture of modular surface drainage systems, HAURATON drainage products have been supplied onto major projects within international markets for over sixty-five years.

We developed our first linear drainage system in 1956. Since that time the HAURATON brand has become known around the world as a benchmark for quality, reliability, durability and service.



## Environmentally Aware

HAURATON has environmentally sound production facilities, processes and procedures.

RECYFIX systems are manufactured from recycled Polypropylene (PP), which is 100% recyclable following life-time use.

HAURATON drainage systems can assist in the assignment of credits based on the BREEAM and LEED rating systems. HAURATON maintains an Environmental Management System according to DIN EN ISO 14001:2015

Refer to HAURATON for further information.





# Surface Drainage

## Product Range

HAURATON offers a wide range of external surface drainage systems and water technology products suitable for a variety of project applications, including residential, commercial, municipal, industrial, military, transport and major infrastructure projects.

**RECYFIX** - A robust, high-performance range of channel systems in corrosion-resistant composite materials (PP, PA-GF). HAURATON is the innovator and market-leader in this field and provides the widest range of commercial-grade composite channel systems available.

**FASERFIX** - Strong and durable drainage channels in Fibre Reinforced Concrete (FRC).

**AQUAFIX** - A modern, efficient and versatile range of separators in composite materials (PP, PE), steel and concrete; for sustainable preservation of vital resources.

**DRAINFIX** - Stable, safe and cost-effective infiltration and water storage systems.

**DACHFIX, DRAINFIX CLEAN, RECYFIX TRAM** and **SERVICE Channels** are specialist ranges available for unique applications.

Customised Drainage Solutions are also available for projects with special requirements.

HAURATON channel systems can be supplied with a variety of functional, decorative and HeelSafe gratings or with discreet 'longitudinal' slot channel designs, for load-class applications from A 15 up to F 900, offering significant choice and flexibility.


With superior design and engineering, HAURATON sets the industry standard with high-quality, visually aesthetic and technically innovative products that meet project requirements and complement modern building and landscape design.

## Product Selectors

Our Product Selector's have been designed to provide industry professionals with a quick, simple and clear guide to choosing the appropriate HAURATON system to suit their project requirements.

Each Product Selector include's project applications with similar needs regarding loading and system performance:

- Roof Terraces, Balconies & Facades
- Public Realm & Shared Space
- Car Parks & Commercial
- Industrial
- Ultra-Heavy-Duty
- Airports
- Ports & Terminals

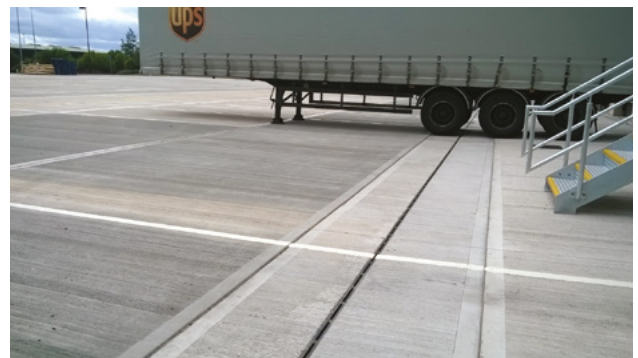

# Ports & Terminals - Quayside

**Drainage systems for corrosive environments subject to harsh conditions, 'ultra-heavy-duty' loads and extreme dynamic forces.**

## System Requirements

'Quayside' environments typically include the following characteristics:


- High safety requirements; monolithic systems, retained gratings / covers, durable and secure locking mechanisms.
- Robust design of pavements and surface structures to prevent settlement; construction on reclaimed land.
- Extreme loads and forces; F 900 (wheel, static, impact and dynamic). Constant traffic by fully-laden forklifts, reach stackers, heavy goods vehicles and other operations vehicles. Possibly the worst-case environment for surface drainage.
- Intense traffic patterns (variety, frequency, speed, acceleration, braking, turning, angled approach).
- Varied wheel type and configuration (small, solid, pneumatic, single, multi-tyre, single-axle/double-axle/multi-axle etc).
- High surface water run-off (high rainfall, extensive catchment areas).
- Dirty and corrosive environments (saline conditions, ground sulphates, high humidity, extreme temperatures, strong UV radiation, sand abrasion, de-icing salts, chemicals, hydrocarbon fuels and oils, loose raw materials etc).
- High-performance surfaces (concrete, high-spec asphalt, high-load paving units).
- Cost-effective installation and maintenance.

HAURATON systems meet and exceed the requirements for 'quayside' applications on ports and terminals, and have high-level resistance when subject to such intense and corrosive conditions.

## Typical Applications

Applications in airport 'airside' areas include:

- Quayside Areas
- Ports & Docks
- Harbours & Wharfs
- Container Terminals
- Access Roads & Highways
- High Security Areas
- Transport Terminals
- Fuel Storage Facilities
- Warehouse, Distribution & Logistics Centres

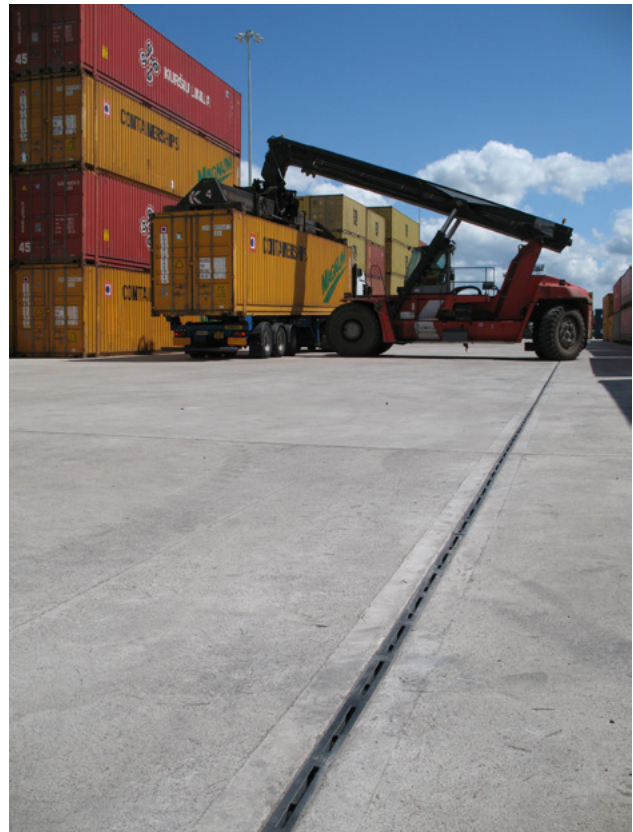





# FASERFIX SUPER

A strong, durable and reliable grated channel system in fibre-reinforced concrete, with a proven structural design for superior resistance to dynamic forces and extreme loads.

**FASERFIX SUPER** has a higher specification compared to alternatives, for assured performance and reduced maintenance costs during all stages of the projects life. Refer to product brochure for detailed information.

## Key Features

### Material

- Fibre-reinforced concrete

### Loading

- Channel body load rated to F 900 (EN 1433: 2002)

### Channel Widths

- 100, 150, 200, 300, 400 & 500 mm

### Channel Lengths

- 1.0m & 500mm (selected depths)

### Grating Options

- Inlay design
- D 400, E 600 & F 900 (EN 1433: 2002)
- Spheroidal ductile iron GJS 500-7 'EN1563'
- Slotted grating
- GUGI-mesh grating
- Solid cover
- KTL 'cathodic dip' coating (optional)


### Channel Configuration

- Constant-depth (same channel depth)
- Built-in fall (150, 200, 300)
- Stepped-fall

### Edge Detail

Two options:

- Galvanised steel S275J263+Z
- Spheroidal ductile iron GJS 500-7 'EN1563' (KTL 'cathodic dip' coated).

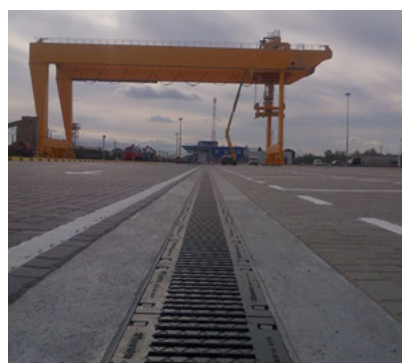



# FASERFIX BIG BL

Cast from high-performance 'HRS' cement concrete, **FASERFIX BIG BL** has a mega-monoblock design incorporating the channel surround, base and steel reinforcement cage within a single rigid 'concrete beam' structure for increased strength, stability and high resistance to impact loads.

**FASERFIX BIG BL** is estimated to be ten times quicker to install (F 900 locations) compared with alternative systems. Refer to product brochure for detailed information.

## Key Features

### Material

- 'HRS' cement concrete

### Loading

- System load rated to F 900 (EN 1433: 2002)
- \*Units tested up to 2000kN without failure

### Channel Widths

- 100, 150, 200 & 300 mm

### Channel Lengths

- 4.0m & 1.0m

### Grating Options


- Inlay design
- D 400, E 600 & F 900 (EN 1433: 2002)
- Spheroidal ductile iron GJS 500-7 'EN1563'
- Slotted grating
- GUGI-mesh grating
- Solid cover
- KTL 'cathodic dip' coating (optional)

### Channel Configuration

- Constant-depth (same channel depth)

### Edge Detail

- Galvanised steel S275J263+Z

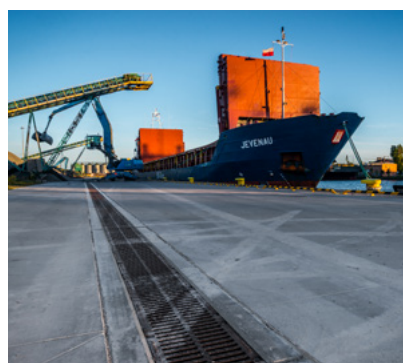





# MONOTEC ULTRA

**MONOTEC ULTRA** incorporates an elevated grating structure (100mm high) in spheroidal ductile iron GJS 500-7, designed for maximum strength and durability to withstand dynamic forces and heavy-duty loads (F 900).

The 'grating-to-channel body' connection sits deep underground, achieving a monoblock type structure (no removable gratings) when installed for high-security and improved safety for vehicles and pedestrians. The grating is fully retained and supported by the channel concrete encasement through extended grating flanges (no loads / no forces imposed on channel body). Refer to product brochure for detailed information.

## Key Features

### Material

- Recycled Polypropylene (PP) composite

### Loading

- MONOTEC ULTRA system load rated to F 900 (EN 1433)

### Channel Widths

- 200mm & 300mm

### Channel Length

- 1.0m

### Grating Options

- Elevated grating structure (non-removable)
- Extended grating flange supported by channel concrete encasement
- Slotted grating design; anti-slip surface
- Spheroidal ductile iron GJS 500-7 'EN1563'

### Channel Configuration

- Constant-depth (same channel depth)

### Edge Detail

- Elevated grating in spheroidal ductile iron GJS 500-7 'EN1563'
- Durable edge; impact resistant

\*Ideal for level crossings





# RECYFIX HICAP F SLOT CHANNEL

Manufactured from high-grade modified Polypropylene (PP) composite, **RECYFIX HICAP F SLOT CHANNEL** is a high-capacity linear drainage system used to provide efficient and cost-effective drainage and attenuation within extensive hard surface areas. Refer to product brochure for detailed information.

## Key Features

### Material

- Modified Polypropylene (PP) Composite
- Some components in Polyamide (PA-GF)

### Loading

- System load rated to F 900 (EN 1433: 2002)

### Channel Sizes

- HICAP F 1000, 2000, 3000, 5000, 8000 & 10000

### Channel Lengths

- 1.0m & 1.145m (RECYFIX HICAP F 10000)

### Grating Options



- Retained grating design (non-removable)
- D 400 & F 900 (EN 1433: 2002)
- Spheroidal ductile iron GJS 500-7 'EN1563' (KTL 'Cathodic Dip' Coated)

- Slot 14mm
- Slot 28mm

### Channel Configuration

- Constant-depth (same channel depth)
- Stepped-fall

\*This system is especially resilient to dynamic forces caused by the turning/twisting action of wheels.

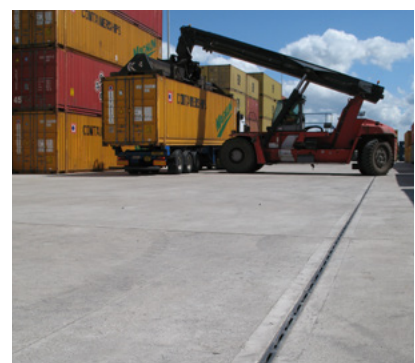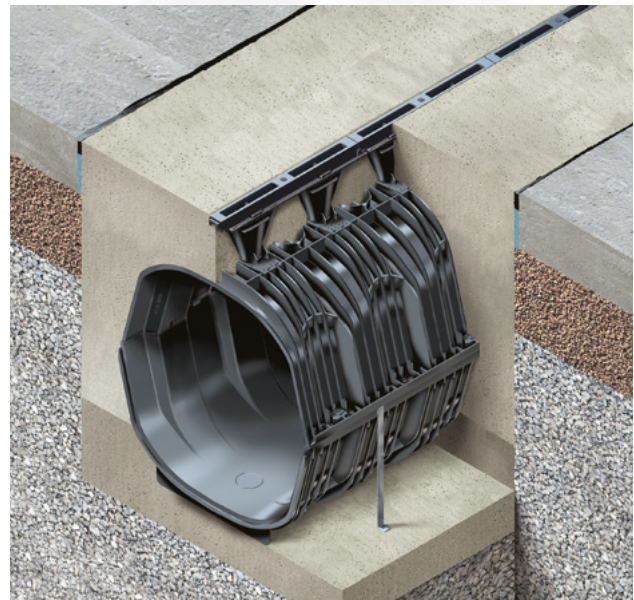





# RECYFIX NC

**RECYFIX NC** combines heavy-duty (E 600kN) loading capability with practical design, easy handling, quick installation and high-performance on site.

**RECYFIX NC** has a polypropylene edge-frame incorporated within the channel body structure, for improved durability and resilience when trafficked. The system is supplied to site as a fully assembled unit, with heavy-duty slotted gratings (spheroidal ductile iron GJS 500-7) securely bolted within the edge-frame housing (eight steel bolts per metre) for extra strength and safety. Refer to product brochure for detailed information.

## Key Features

### Material

- Polypropylene (PP) composite

### Loading

- System load rated to E 600 (EN 1433: 2002)

### Channel Widths

- 100, 150, 200, 300 & 400 mm

### Channel Lengths

- 1.0m & 500mm (selected depths)

### Grating Options


- Inlay design
- D 400 & E 600 (EN 1433: 2002)
- Spheroidal ductile iron GJS 500-7 'EN1563'
- Slotted grating

### Channel Configuration

- Constant-depth (same channel depth)
- Stepped-fall

### Edge Detail

- Polypropylene edge-frame
- Integral part of channel body structure

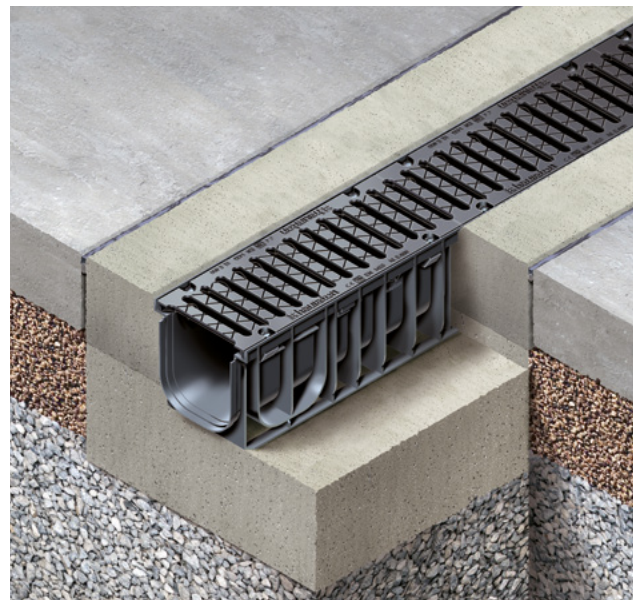



# SERVICE CHANNELS

HAURATON SERVICE Channels provide a safe, practical and durable solution for the management and routing of underground cables, utilities and services. The system is supplied with a range of modular accessories including cable trays and junction boxes for easy access and flexible 'space-efficient' design.

SERVICE Channels can be configured from either **RECYFIX** or **FASERFIX** systems, with the most suitable type and size of channel selected to suit specific project requirements.

## Key Features

### Material

- RECYFIX channels in modified Polypropylene (PP)
- FASERFIX channels in fibre-reinforced concrete

### Loading

- Polypropylene (PP) channels load rated to E 600
- Fibre-reinforced concrete channels load rated to E 600 (EN 1433: 2002)

### Channel Widths

- 100, 200, 300, 400 & 500 mm

### Channel Lengths

- 1.0m

### Cover Options


- Inlay design
- Solid covers (anti-slip)
- A 15 & E 600 (EN 1433: 2002)
- Galvanised steel 'chequer plate' (A 15)
- Spheroidal ductile iron GJS 500-7 'EN1563'
- KTL 'cathodic dip' coating (optional)
- Side-Lock boltless locking mechanism

### Channel Configuration

- Constant-depth (same channel depth)

### Edge Detail

- Galvanised steel S275J263+Z
- Spheroidal ductile iron GJS 500-7 'EN1563' (KTL 'cathodic dip' coated)

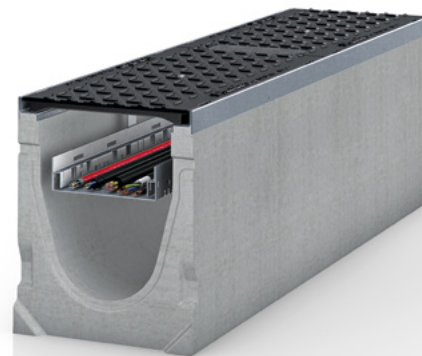



# Ports & Terminals - Landside

**Drainage systems for environments that require safe, durable, practical and cost-effective solutions.**

## System Requirements

Port and terminal 'landside' areas typically include the following characteristics:

- Medium to ultra-heavy-duty loads (C 250 - F 900); depending on location (wheel, static, impact loads and dynamic forces). Channels at the base of ramps subject to high impact, so heavier load rating required (D 400 & E 600). Use by personnel and the general public is intensive, so medium-duty (C 250) systems should be selected for pedestrian areas.
- Medium to high traffic flow; varied traffic patterns (frequency, speed, acceleration, braking, turning, angled approach). Channel installations in parking areas are subject to regular traffic with wheels turning on gratings, imposing dynamic forces.
- A variety of landside applications subject to varied wheel types and configurations (trolleys, small-wheel, solid tyre / pneumatic tyre, passenger and service vehicles with single-tyre / multi-tyre / single-axle / double-axle). High loads and dynamic forces imposed through front wheel configuration on forklift trucks and reach stackers.
- Public areas subject to constant use requiring surface drainage system design to be strong, durable, practical and functional for long-term high performance.
- Safe, secure environments for operational staff, passengers and other users is paramount. Systems require hydraulically efficient and user-friendly 'HeelSafe' gratings, monolithic design or 'tamper-free' security locking, and surface features that allow barrier-free access.
- Port and terminal infrastructure often includes multi-level spaces with complex structural designs. Shallow channel systems are often required for multi-storey parking areas, raised walkways, mezzanine floors etc.
- Coastal environments are extremely corrosive, requiring system design and materials to have a high-level of durability and corrosion resistance.
- Cost-effective installation and maintenance. Reliable system performance is required for 24/7 operations.

HAURATON systems meet and exceed requirements for a variety of 'landside' applications at ports and terminals, with a versatile range that provides total design flexibility.

## Typical Applications

Applications in port and terminal 'landside' areas include:

- Marinas
- Public Spaces
- Terminal Buildings
- Access Roads
- Petrol Filling Stations
- Free Ports & Free Zones
- Hotels & Commercial Centres
- Warehouse, Distribution & Logistics Centres
- Parking Areas (Cars, Coaches, Lorries, Other)





# RECYFIX MONOTEC

Designed and installed as a single monolithic unit, **RECYFIX MONOTEC** is quick and easy to install and provides a stable, safe and secure surface environment for users. **RECYFIX MONOTEC** is lighter and has higher drainage capacity compared with alternative mineral-based systems (for equivalent channel sizes and installed dimensions).

Manufactured from reinforced Polypropylene (PP) composite, channel units are strong, durable and UV-stable, with high impact, chemical and corrosion resistance for low-cost maintenance during life-time use. Refer to product brochure for detailed information.

## Key Features

### Material

- Reinforced Polypropylene (PP) composite

### Loading

- System load rated to D 400 (EN 1433: 2002)

### Channel Widths

- 100 & 200 mm

### Channel Lengths

- 1.0m

### Grating Options

- Monolithic channel with integral grating
- D 400 (EN 1433: 2002)
- Slotted grating design (FIBRETEC style)
- Reinforced Polypropylene (PP) composite

### Channel Configuration

- Constant-depth (same channel depth)
- Stepped-fall

### Edge Detail

- Monolithic design; channel edge and grating combined

\*Not suitable for E 600kN and F 900kN load applications subject to traffic by forklift trucks and HGV's.







# FASERFIX KS

Cast from fibre-reinforced concrete, **FASERFIX KS** is a strong and durable 'general-purpose' channel system designed for use in a variety of applications (usually C 250 - E 600).

**FASERFIX KS** has thicker sidewalls (30mm) compared with alternatives. A metal edge-frame (galvanised or stainless steel) cast deep within the channel body achieves a rigid and discreet edge-detail for extra strength and enhanced aesthetics. Gratings are fixed into position with a 10-point locking system (SIDELOCK plus central bolt and bar arrangement) for added safety, stability and security. Refer to product brochure for detailed information.

## Key Features

### Material

- Fibre-reinforced concrete

### Loading

- Channel body load rated to F 900 (EN 1433: 2002)
- System typically installed in E 600 load environments
- Suitable for F 900 environments (light traffic only)
- Refer to FASERFIX SUPER for F 900 environments (heavily trafficked)

### Channel Widths

- 100, 150, 200 & 300 mm

### Channel Lengths

- 1.0m & 500 mm (selected depths)

### Grating Options

- Inlay design
- Load options ranging from A 15 - F 900 (EN 1433: 2002)
- Variety of grating designs and material's available (over 20)
- Refer to product brochure

### Channel Configuration


- Constant-depth (same channel depth)
- Built-in fall (150, 200, 300)
- Stepped-fall

### Edge Detail

Two options:

- Galvanised steel S275J263+Z
- Stainless steel CNS 1.4301
- Neat, discreet, rigid and aesthetic

\*When gratings are fixed with locking bolts/bars, this system is especially resilient to dynamic forces caused by the turning/twisting action of wheels.

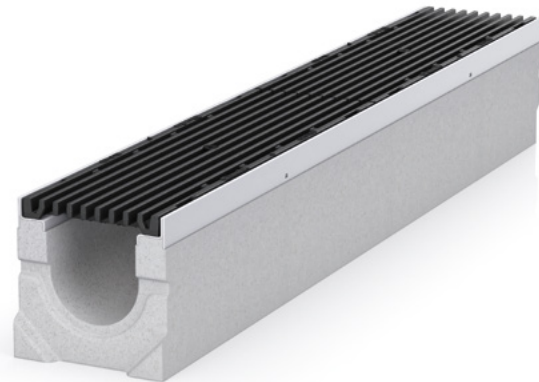



# RECYFIX PLUS

A medium-duty system selected for use when durability and aesthetics are important project requirements.

**RECYFIX PLUS** incorporates a neat and discreet steel edge-rail that accommodates all surface finishes and complements contemporary features in modern buildings and landscape design. This design feature also provides improved rigidity and protection at the channel edge.

**RECYFIX PLUS** is fitted with a range of 'lay-on' gratings in a variety of materials, designs and loading options up to D 400kN. Refer to product brochure for detailed information.

## Key Features

### Material

- Modified Polypropylene (PP) composite

### Loading

- System load rated to D 400 (EN 1433: 2002)

### Channel Widths

- 100, 150, 200 & 300 mm

### Channel Lengths

- 1.0m & 500mm (selected depths)

### Grating Options

- Lay-on design
- Load options ranging from A 15 - D 400 (EN 1433: 2002)
- Variety of grating designs and material's available
- Refer to product brochure

### Channel Configuration

- Constant-depth (same channel depth)
- Stepped-fall

### Edge Detail

- Steel edge-rail fitted

Two options:

- Galvanised steel (DX51D+Z275-MA-C)
- Austenitic stainless steel (AISI Grade 304; EN CNS 1.4301)
- Neat, discreet, rigid and aesthetic







# RECYFIX PRO

A medium-duty system with practical design suitable for a variety of applications up to D 400 loading. When fitted with a composite grating, **RECYFIX PRO** is fully corrosion resistant, non-conductive and anti-static; reducing long-term maintenance costs and avoiding expensive earthing works.

**RECYFIX PRO** incorporates a discreet polypropylene edge-frame formed as part of the channel body structure, for improved rigidity and enhanced aesthetic appearance. The system is pre-assembled, lightweight and compact for quick and easy installation on site. Refer to product brochure for detailed information.

## Key Features

### Material

- Modified Polypropylene (PP) composite

### Loading

- System load rated to D 400 (EN 1433: 2002)

### Channel Widths

- 100, 150, 200 & 300 mm

### Channel Lengths

- 1.0m & 500mm (selected depths)

### Grating Options

- Inlay design
- Load options ranging from A 15 - D 400 (EN 1433: 2002)
- Variety of grating designs and material's available
- Refer to product brochure

### Channel Configuration

- Constant-depth (same channel depth)
- Stepped-fall

### Edge Detail

- Polypropylene edge-frame
- Integral part of channel body structure





# SLOTTED CHANNEL

**SLOTTED CHANNEL** achieves high standards in quality and design, combining both aesthetic appeal and practical performance. The discreet linear surface detail complements modern building architecture and external landscape design, achieving a simple, safe and durable installation.

With high intake capacity through the surface slot opening, **SLOTTED CHANNEL** provides efficient and effective drainage of surface water in locations around the world that experience the highest rainfall intensities. Test data available on request. The **SLOTTED CHANNEL** system includes an access cover accessory for quick, simple cleaning and maintenance. Refer to product brochure for detailed information.

## Key Features

### Material

- Modified Polypropylene (PP) composite
- Fibre-reinforced concrete

### Loading

- Channel body load rated to D 400 / E 600 (EN 1433: 2002)

### Channel Widths

- 100, 150 & 200 mm

### Channel Heights

- Refer to Slotted Channel brochure
- Slotted channels can also be custom-made to suit most site requirements

### Channel Lengths

- 1.0m & 500mm (selected depths)

### Slotted Cover Options

- Load options ranging from A 15 - E 600 (EN 1433: 2002)
- A-symmetric cover design
- Slot height options of 105mm (UK)
- Slot height options of 105mm, 160mm & 200mm (international)
- Galvanised steel (DX51D Z275)
- Austenitic stainless steel (AISI Grade 304, 316, other)
- Refer to product brochure


### Channel Configuration

- Constant-depth (same channel depth)
- Stepped-fall

### Edge Detail

- Slot width options in 10mm (UK)
- Slot width options in 10, 12, 14 & 18 mm (international)

\*The A-symmetric slotted cover can be used along building facades, walls and landscape features at ground level.

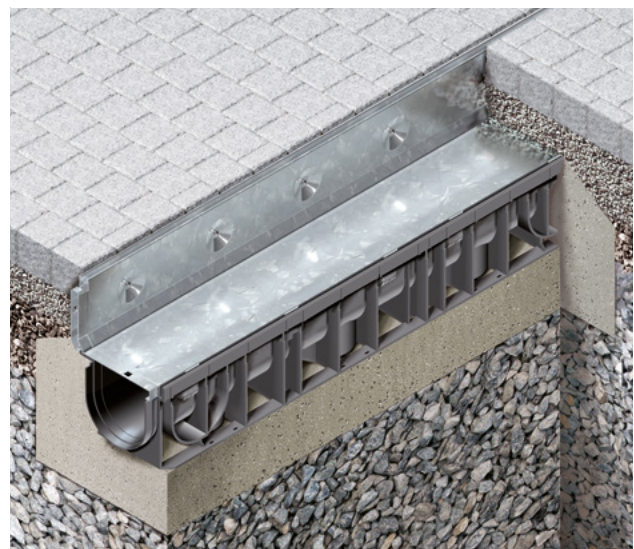






# SLOTTED CHANNEL

Further information regarding intake capacity is available on request.

**Slot Width:** 10.0mm  
**Intake Area:** 100 cm<sup>2</sup>/m  
**Max intake:** 6.7 l/s/m  
**Area Drained/ Lin. Mtr:** 482 m<sup>2</sup>  
 (with rainfall intensity at 50 mm/hr)

Access Boxes provide quick/easy entry into the system for cleaning and maintenance

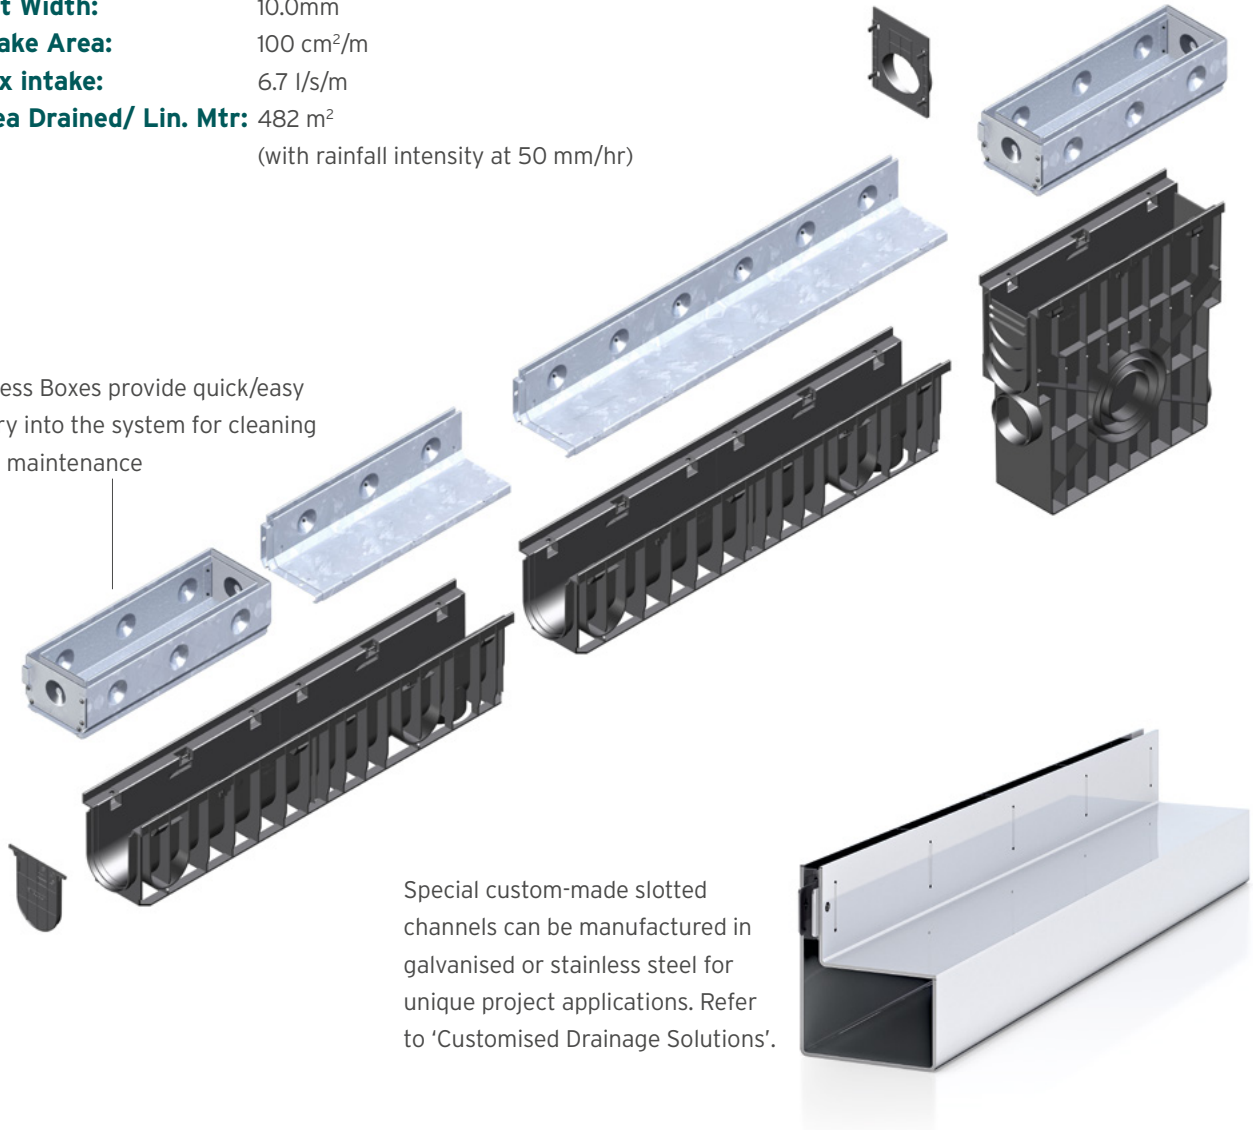



# CUSTOMISED DRAINAGE SOLUTIONS

HAURATON provides **CUSTOMISED DRAINAGE SOLUTIONS** to meet very specific requirements for unique and innovative applications. A bespoke approach offers total flexibility regarding channel width, depth, configuration, edge-detail, materials, inlet/grating design, type/location of outlets and other special system characteristics.

**CUSTOMISED DRAINAGE SOLUTIONS** provide the perfect design when project needs require high-quality aesthetics with superior and precise performance. Designs include specialist grated and slotted channel systems. Refer to product brochure for detailed information.

## Key Features

### Material

- Corten steel
- Galvanised steel
- Stainless steel (various grades)
- Other specialist materials to suit project needs

### Loading

- Generally A 15 - D 400 (EN 1433: 2002)
- System designed to meet load requirements

### Channel Widths

- Sized to meet hydraulic requirements

### Channel Lengths

- Variable
- Modular sections fabricated to meet specific configurations
- Polygon or radial designs available

### Grating/Cover Options


- Designed to meet performance and load requirements (EN 1433:2002)
- Variety of designs, materials, colours and finishes available
- Refer to product brochure

### Channel Configuration

- Constant-depth (same channel depth)
- Built-in fall

### Edge Detail

- Designed to meet project requirements
- Neat, discreet, rigid and aesthetic

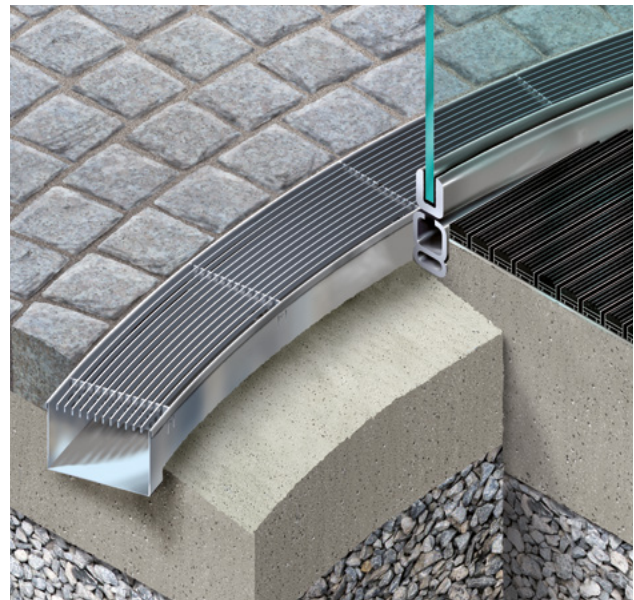






# UNIQUE DESIGNS

Customised channel designs for special applications (entrance ways, public spaces, roof terraces, balconies, facades, others).

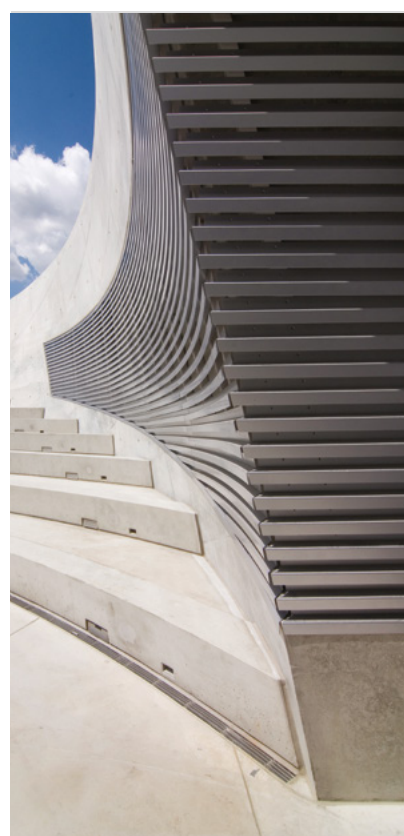



# FIBRETEC GRATINGS

Bring colour, bring life to projects.

HAURATON's range of FIBRETEC gratings in Glass-Reinforced Polyamide composite combines superior performance with enhanced aesthetics, bringing longevity and life to projects.

## Benefits

FIBRETEC gratings have the following benefits:

- UV stable
- HeelSafe (9mm opening)
- Corrosion resistant; no oxidation
- Anti-static and none conducting
- High resistance to chemicals, fuels, salts etc

\*Compatible with **RECYFIX PRO** and **FASERFIX KS** systems

Readily available in standard colours:

- Fern
- Sand
- Stone
- Black







# SHALLOW CHANNELS

The core range of **RECYFIX** and **FASERFIX** grated channel systems (A 15 – E 600) are available in shallow channel options, with a variety of shallow depth dimensions no greater than 115mm deep (see below).

Shallow channel options are generally 100mm wide (other channel widths are available in reduced height dimensions). Shallow channels can be used in most applications where there is a depth restriction. When used in raised concrete structures, channels should be installed with sealed joints and above a Damp Proof Membrane (DPM). Refer to product brochure for detailed information.

## Key Features

### Material

- Modified Polypropylene (PP) composite
- Fibre-reinforced concrete

### Loading

- Depends on system selected
- A 15 – E 600 (EN 1433: 2002)

### Channel Widths

- 100 mm
- Shallow channels also available in wider sizes

### Channel Heights

- **RECYFIX STANDARD**: 60, 80 & 100 mm
- **RECYFIX PRO**: 75, 95 & 115 mm
- **RECYFIX PLUS**: 60, 80 & 100 mm
- **RECYFIX NC**: 75 mm
- **FASERFIX KS**: 80, 100 & 110 mm

\*Overall height dimension provided

### Channel Lengths

- 1.0m

### Grating Options



- Lay-on or inlay design
- Load options ranging from A 15 – E 600 (EN 1433: 2002)
- Variety of grating designs and material's available
- Refer to product brochure

### Channel Configuration

- Constant-depth (same channel depth)

### Edge Detail

- Integral polypropylene edge (visible on the surface)
- Galvanised steel S275J263+Z
- Stainless steel CNS 1.4301
- Neat, discreet, rigid and aesthetic

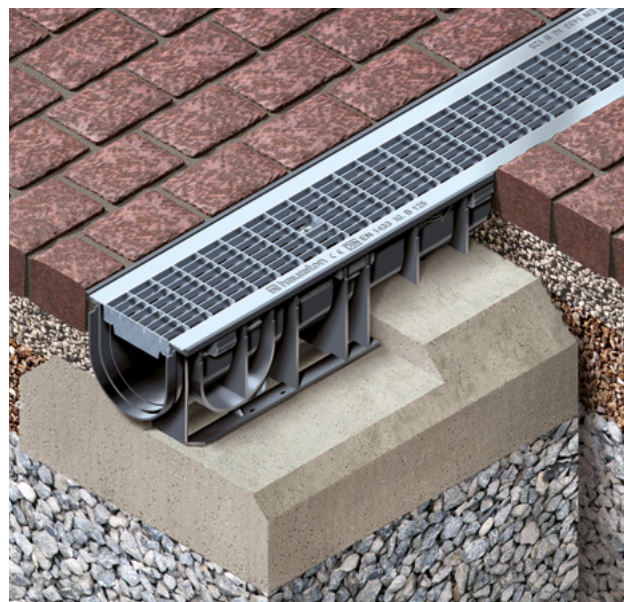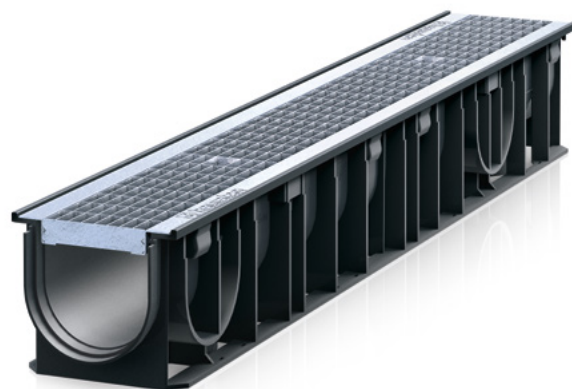



# AQUAFIX SEPARATORS

HAURATON's range of advanced and efficient **AQUAFIX** Separators reduce pollution for environmental protection by providing mechanical separation of contaminants (hydrocarbon compounds, light liquids, metals, fine particles, grease, fatty acids, other harmful elements) from surface water or effluents, achieving water cleansing efficiency up to 99.9%.

**AQUAFIX** units help return clean water to the natural eco-system for sustainable preservation of vital resources. Contaminants are captured for onward disposal.

## Key Features

### Material

Separators are available in:

- Steel
- Concrete
- Polyethylene (PE)
- Polypropylene (PP)

### Capacities

- Systems customised to suit project needs
- AQUAFIX SKG Coalescence Separators in steel (multiple bypasses fitted) can accommodate flow rates over 4000 lit / sec

### System Design

- Corrosion resistant
- Durable, high quality materials
- Modular design for flexibility
- Advanced and innovative systems
- Modern coalescence separation technology
- Simple, practical design for ease of maintenance

### Treatment Efficiency





- Water cleansing efficiency up to 99.9%.
- Ultra-efficient separation and treatment process

### Standards

- Systems comply with all recognised standards and regulations

### Applications

- |                 |                                    |
|-----------------|------------------------------------|
| ■ Airports      | ■ Industrial Plants                |
| ■ Ports         | ■ Vehicle Washing Facilities       |
| ■ Highways      | ■ Warehouse & Logistics Centres    |
| ■ Factories     | ■ Service Stations & Fuel Stations |
| ■ Parking Areas | ■ Service Yards & Industrial Areas |

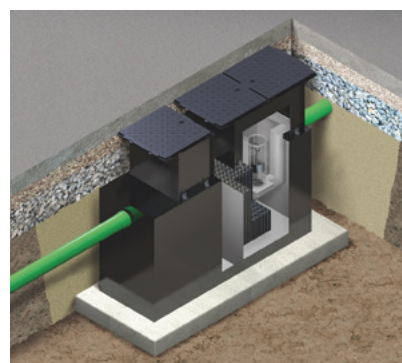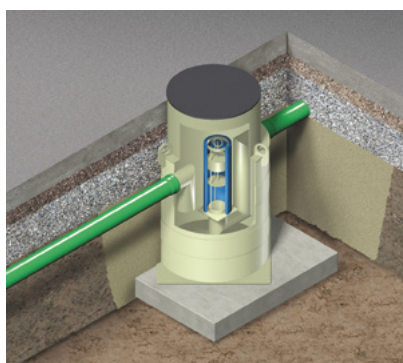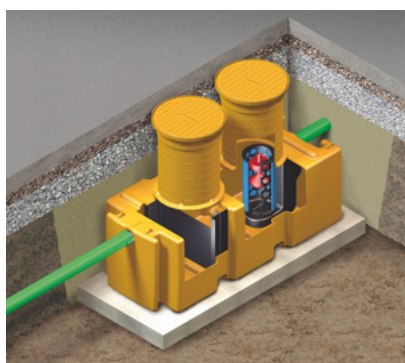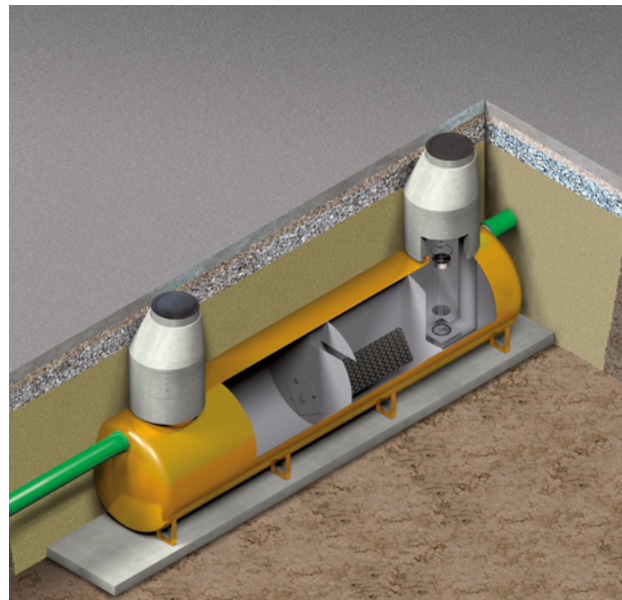



# Total Support

## Projects Team

HAURATON provides close support to ensure drainage design, specification and installation is quick, efficient and cost-effective.

A team of regional, specification and project managers are available to assist industry professionals at every stage of the construction process. Refer to HAURATON for contact details ([www.hauraton.com](http://www.hauraton.com)).

A multinational company, HAURATON has production facilities, subsidiary offices, technical engineers and partners located in many countries and regions of the world.

HAURATON has the knowledge, experience and resources to manage and support all projects successfully, regardless of location.

## Design Service


HAURATON offers a comprehensive design service for all product ranges. This is available free of charge and without obligation.

Our approach is to provide innovative 'value-engineered' designs to achieve the most cost-effective drainage solution for the benefit of all parties.

Design proposals can be provided within 24 - 48 hours, depending on the size of the project. Information offered includes:

- Hydraulic calculations for each channel run
- System configuration drawings
- Parts list schedules
- Product dimension drawings
- System installation drawings
- Product and material technical datasheets
- Other technical and support information

Feel free to contact us should you require assistance.

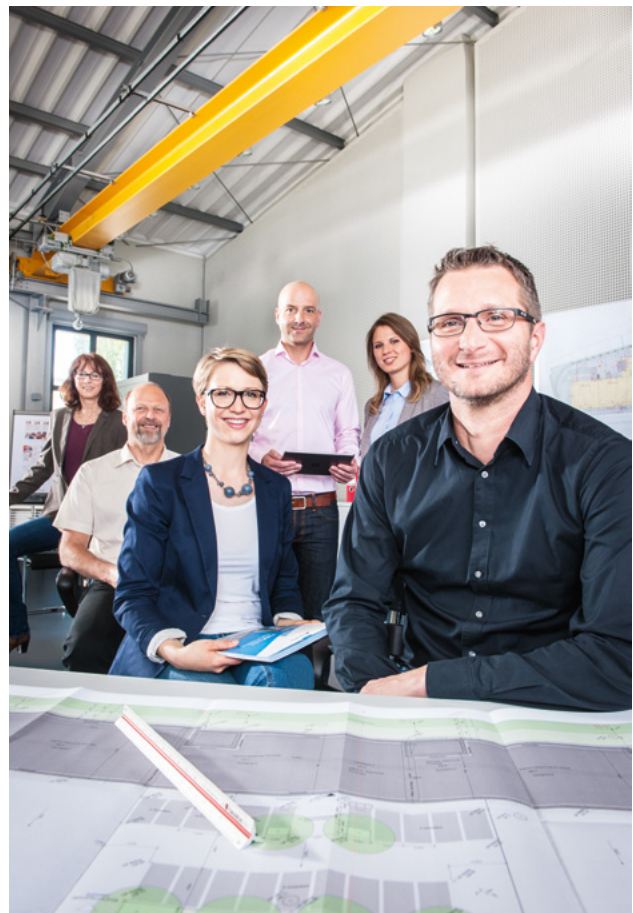

# Design Software

## Hydraulic Design Software

HAURATON provides a comprehensive design service, which is free of charge.

Our channel drainage configurations are designed and sized using 'hydraulic design software' specifically developed for HAURATON systems.

The formula used within the software is based on that determined by Gauckler-Manning-Strickler. Accuracy has been verified by physical testing of HAURATON systems within a hydraulic discharge test flume, replicating and evaluating hundreds of flow scenarios.

HAURATON 'hydraulic design software' has been used successfully in-house by our technical personnel and partners for over 30 years with total reliability.



## HAURATON DesignSoftware

User-friendly and free-of-charge, our web-based application 'DesignSoftware' provides construction industry professionals with quick, simple hydraulic analysis, channel sizing, project design and product specification for the company's core range of surface drainage systems (for landscape, commercial and civils projects) whilst working on their own desk-top and lap-top computers.

HAURATON 'DesignSoftware' provides engineers with the flexibility to create their own drainage designs, with just three clicks to a hydraulic calculation.

Follow the link below to register and use the software:

<https://hydraulicdesign.hauraton.com/register/>

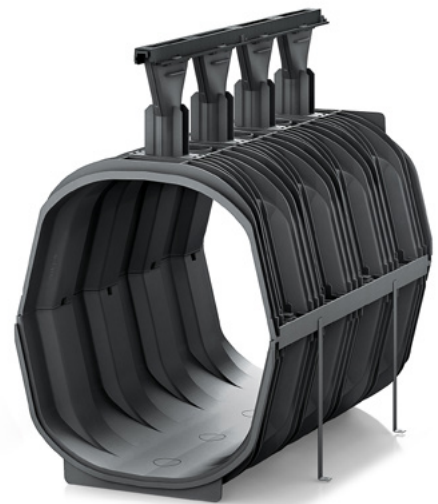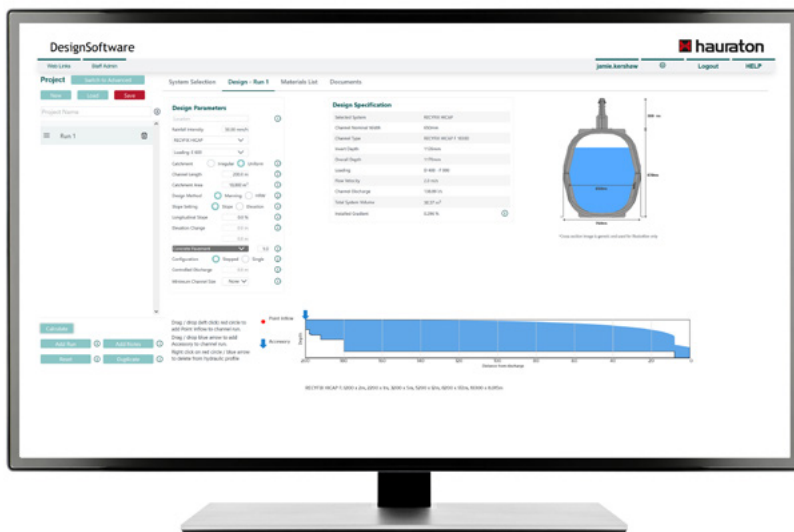



# Quality Assurance

## High Standards

HAURATON products and procedures bring quality assurance.


The company operates in accordance with EN ISO 9001: 2015. Production within modern, mechanised facilities in Europe is carefully monitored and controlled to achieve consistent product quality.

HAURATON drainage channels have been independently tested for load capacity and watertightness in accordance with the European Standard EN 1433: 2002. Systems are CE marked for quality assurance.

## Proven Performance

Supplied for over sixty-five years and thirty years respectively, **FASERFIX** and **RECYFIX** systems have proven performance, having been used successfully on major projects around the world. Individual project case studies are available from HAURATON.

HAURATON has a reputation for products of the highest quality, durability and reliability.

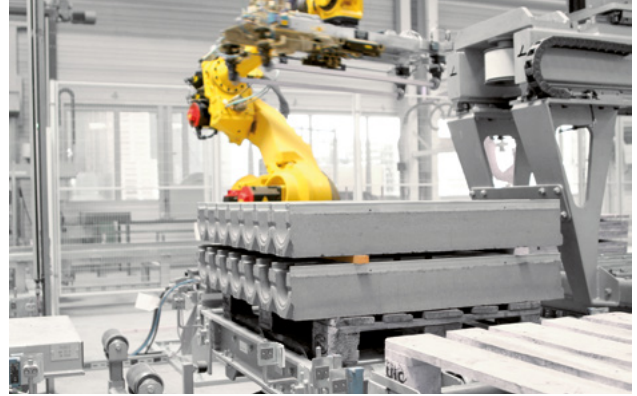

# Port & Terminal Project List

HAURATON drainage systems have been used on the following projects and more...

## Europe

AV Dawson Inland Container Port, UK  
Bulkhaul Inland Container Port, UK  
Hartlepool Docks (PD Ports), UK  
Hull Docks (PD Ports), UK  
Immingham Docks (PD Ports), UK  
Southampton Port, UK  
Teeside Container Terminal, Middlesbrough, UK  
Neptune Yard Docks, Wallsend, Newcastle, UK  
Berth 7, London Gateway, UK  
Portbury Docks, Bristol, UK  
Grangemouth Docks, Scotland  
Rosyth Docks (MOD), Scotland  
Dublin Port, Ireland  
Jubilee Quay, East Quay & Greenwell Quay, Port of  
Sunderland, UK  
SNOP IAMP (International Advanced Manufacturing Park),  
Port of Sunderland, UK  
Seaforth Docks, Peel Ports, Liverpool, UK  
Port of Blyth, UK  
  
Container Terminal, Port Burgas, Bulgaria  
Port of Lom, Bulgaria  
  
Marina Frapa, Rogoznica, Croatia  
Terminal Gaženica, Zadar, Croatia  
Gaženica Port Parking Area, Croatia  
ACI Marina Dubrovnik, Croatia  
  
Prag Marina, Prague, Czech Republic  
  
Muuga Port, Estonia  
  
Island La Reunion Fishing Basin, France  
Nantes Port, France  
Port Bonneuil-sur-Marne, Paris, France  
Independent Harbour of Paris, France  
Port de Plaisance Sables d'Olonne, France  
Port de La Rague Canne Mandelieu, France  
Port de Saint Malo, France  
Port de Javel, Paris, France  
Port Méthanier, Dunkerque, France  
Port de la Cabaude, Sables d'Olonne, France  
Port de Bercy, Paris, France  
Port Tourrettes, Monaco, France  
Naval Port, Toulon, France  
Port de Concarneau, France  
Polder de Brest, France  
Port du Vivier, France

## Europe

Port de Plaisance, St Malo, France  
Port de Marseille, France  
Port de Sainte Maxime, France  
Port de Commerce, Metz, France  
Port de Gennevilliers, France  
Port de Commerce, Blainville, France  
Port de Commerce, Sète, France  
Port Maritime, Port la Nouvelle, France  
  
City Port, Senftenberg, Germany  
Herne Container Terminal, Germany  
Nuremberg Port, Germany  
Ramstein Container Terminal, Germany  
Rhine Harbour, Andernach, Germany  
BASF Container Terminals: KVT 1, KVT 2 & KVT 3,  
Ludwigshafen, Germany  
Container Terminal, Wolfsburg, Germany  
  
Verbrugge Terminals, Terneuzen, The Netherlands  
  
Container Terminal, Cervignano del Friuli (UD), Italy  
Container Terminal Interporto Civitavecchia (RM), Italy  
Container Terminal Interporto Marche, Jesi (AN), Italy  
Salerno Port, Italy  
Molo Santa Lucia, Palermo, Italy  
Ortona Port, Chieti, Italy  
Livorno Port, Livorno, Italy  
Container Terminal, Segrate, Milan, Italy  
Container Terminal, Gioia Tauro, Italy  
Fincantieri, Palermo, Italy  
Gioia Tauro Port, Italy  
Port of Napoli (Naples), Italy  
Port of Monfalcone, Italy  
Port of Manfredonia, Italy  
  
Cruise Ship Terminal, Valletta, Malta  
  
Quay 12, Ventspils Port, Latvia  
  
Multimodal Railway Container Terminal, Kaunas, Lithuania  
  
Marina, Elblag, Poland  
Sea Port, Gdansk, Poland (multiple projects)  
Sea Port, Gdynia, Poland (multiple projects)  
Scout Waterside, Kołobrzeg, Poland  
Sea Port, Swinoujscie, Poland  
Sea Port, Szczecin, Poland (multiple projects)  
  
Container Terminal, Agigiea, Constanta, Romania  
Container Terminal CSCT, Agigiea South Port, Romania



# Port & Terminal Project List

## Europe

KRONOSPAN Warehouse, Port of Agigiea, Constanta, Romania

Container Terminal KIA Slovakia, Zilina, Slovakia

SPS Logistic centre, Budimir, Slovakia

SPS Logistic centre, Strecno, Slovakia

Port of Koper, Slovenia

Milšped Multimodal Logistic Terminal, Niš, Serbia

## Russia

Seaport 'Ustj Luga', Saint-Petersburg, Russia

## Asia

Marine and Heavy Engineering, Johor Bahru, Malaysia

Kuantan Port, Kuantan, Malaysia

## Australia & New Zealand

Pedestrian Area, Darling Harbour, Sydney

Fergusson Wharf, Auckland, New Zealand

## Canada


Terminal Viau, Montreal Port, Canada

## South America


Lazaro Cardenas Port, Mexico





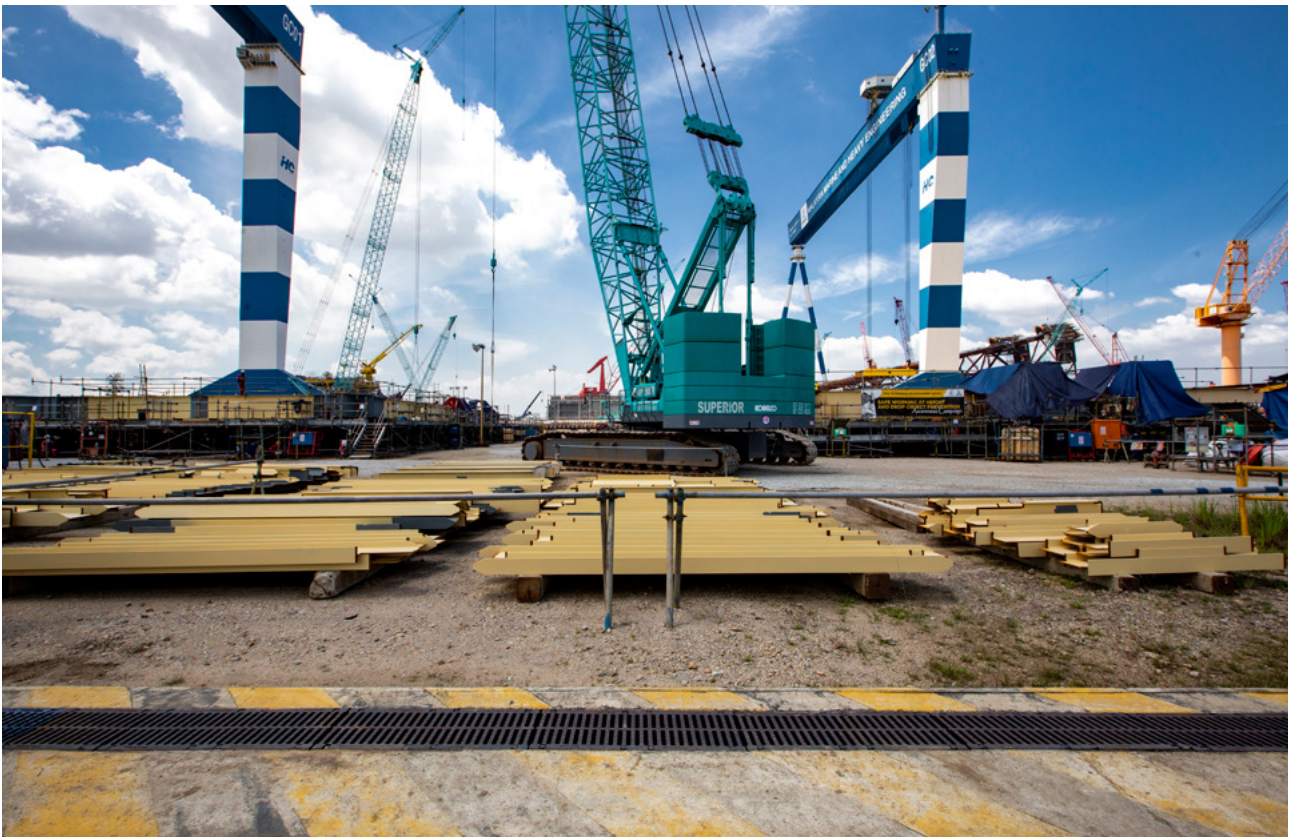

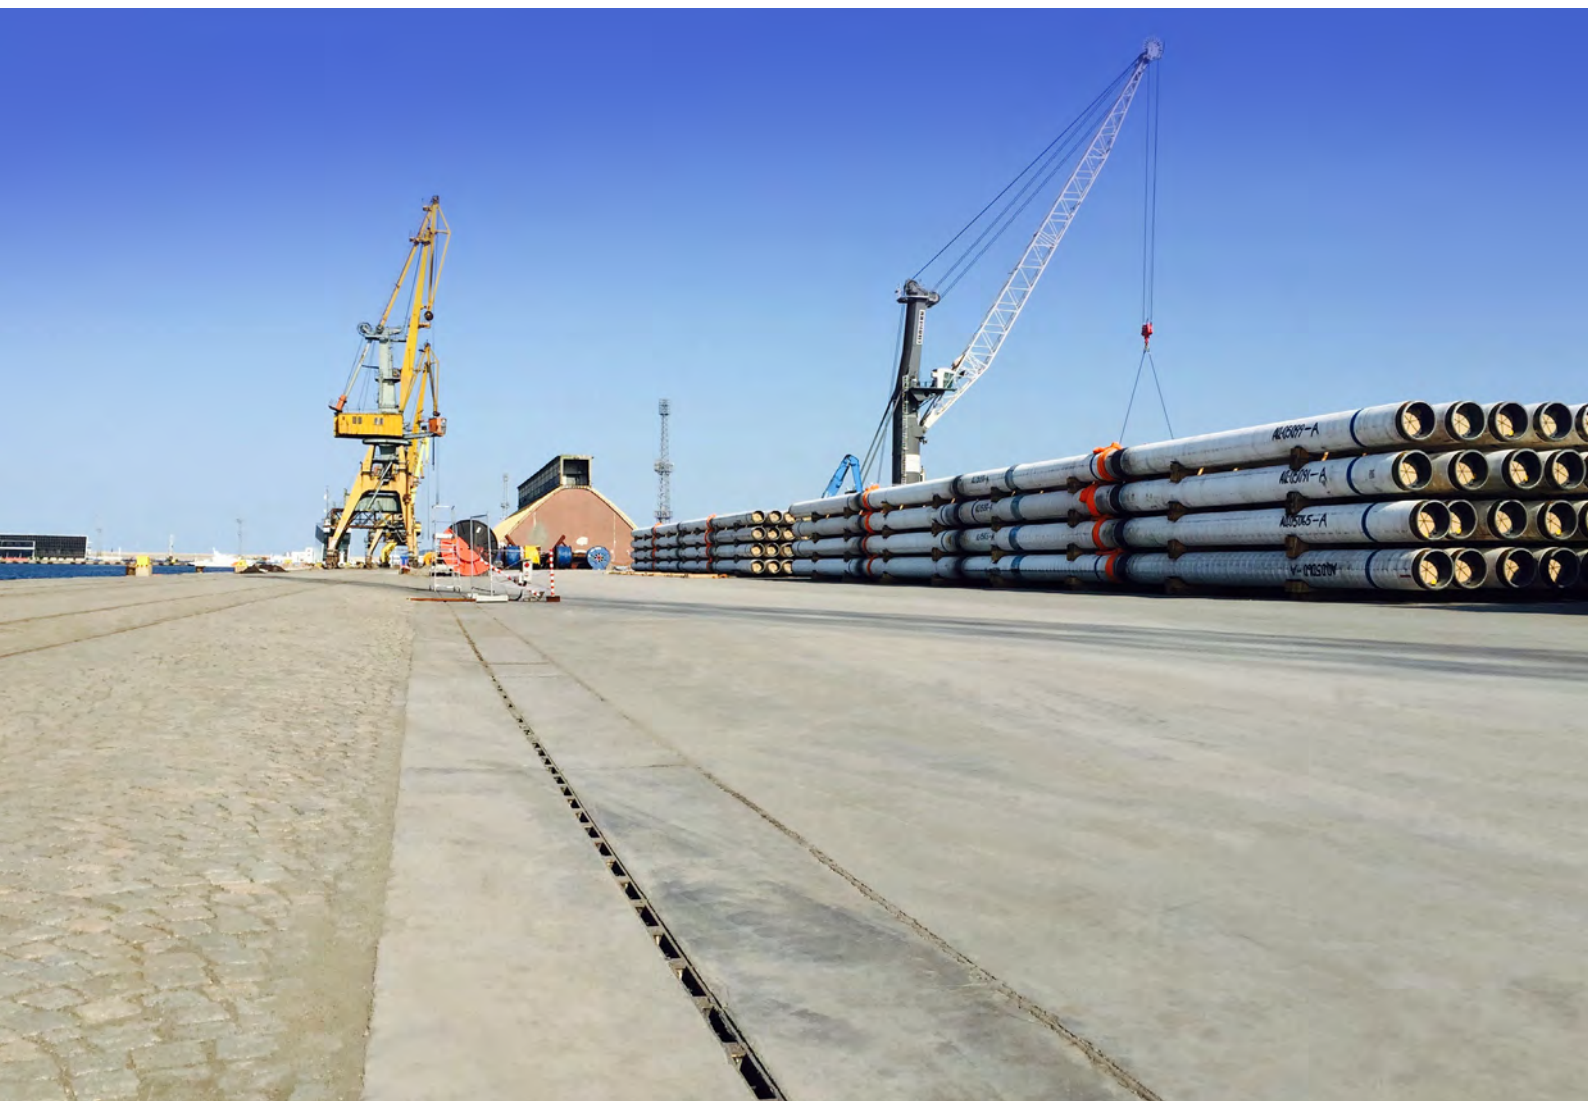

**HAURATON GmbH & Co. KG**

Werkstraße 13  
76437 Rastatt  
Germany

**[www.hauraton.com](http://www.hauraton.com)**

E: [tse@hauraton.com](mailto:tse@hauraton.com)

P: +49 7222 958 0

F: +49 7222 958 100

01/2023 | Printed in Germany.

HAURATON takes reasonable and due care when compiling product information for use within marketing and technical documents. Any guidance, recommendations or advice provided regarding **HAURATON** products and systems is given without guarantees, as conditions relating to the use and installation of products and systems is beyond the control and influence of the company. The customer has the final responsibility to ensure the suitability of the system regarding its use and application for their project.

**HAURATON** reserves the right to make changes to products, system designs and company information without notice.